

JTEKT

Incremental Encoder Series TRD-GN Operation Manual

Thank you for purchasing this series TRD-GN Incremental Encoders. Please read this Operation Manual carefully before applying this product.
PLEASE KEEP THIS MANUAL IN A SAFE PLACE!

JTEKT ELECTRONICS (WUXI) CO.,LTD.

Add: No.6 Lianhe Road, Hudai Town Binhu District, Wuxi, Jiangsu, P.R.China

Pc: 214161 <https://www.jtektele.com.cn>
Tel: (0510)85167888 Fax: (0510)85161393

JELWX-M8175E-E

Safety Consideration

Warning This indicates contents which can cause large accidents leading to loss of life or severe injury when the indication is disregarded and wrong handling is executed.

Caution This indicates contents which can cause injury or material damage when the indication is disregarded and wrong handling is executed.

Explanation of the pictograms

- This symbol indicates a general prohibition.
- This symbol indicates a compulsory item or an instruction.

[Operating environment and conditions]

Warning

- Do not use in a combustible or explosive atmosphere. Otherwise personal injury or fire may be caused.
- Do not use this product for applications related to human safety. Use is assumed in an application where an accident or incorrect use will not immediately cause danger to humans.

[Operating environment and conditions]

Caution


- Use and store the equipment within the scope of the environment (vibrations, impact, temperature, humidity, etc.) specified in the specifications. Otherwise fire or product damage may be caused.
- Understand the product first before use it.

[Installation and wiring]


Warning

- Use only with the power supply voltage listed in the specifications. Otherwise fire, electric shock, or accidents may be caused.
- Use only with the wiring and layout specified in the specifications. Otherwise fire, electric shock, or accidents may be caused.
- Do not apply any kind of stress to the wires. Otherwise electric shock or fire may be caused.


Output circuit

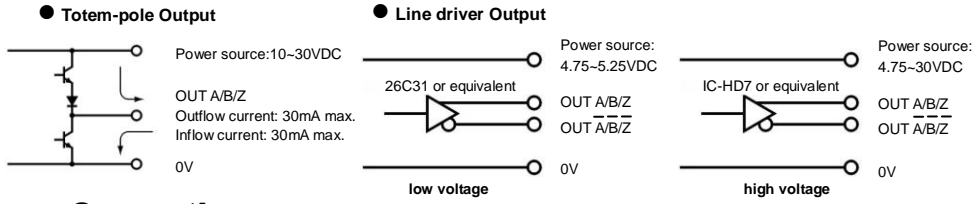


Connection

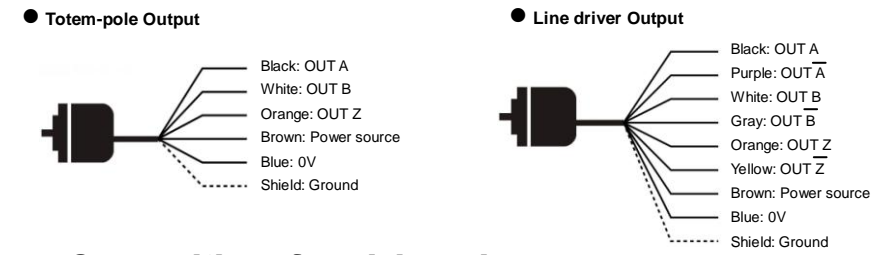


Composition of model number

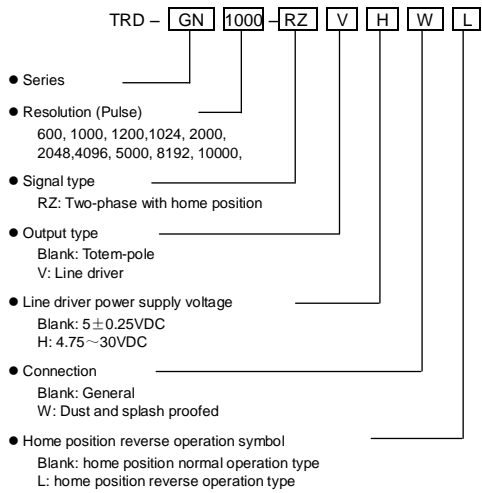


Output signal timing chart

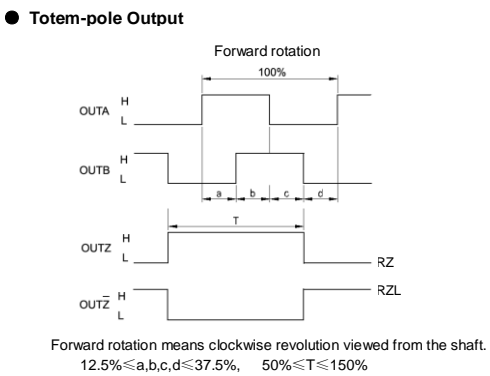

Line Drive Output

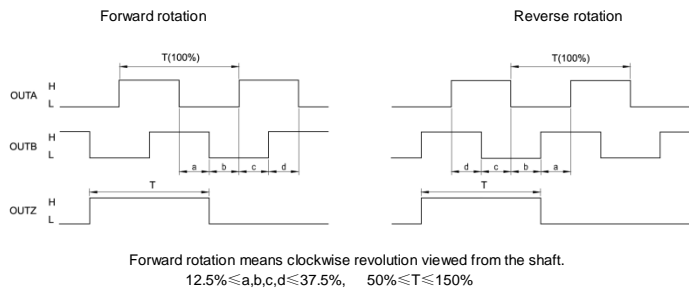

External dimensions

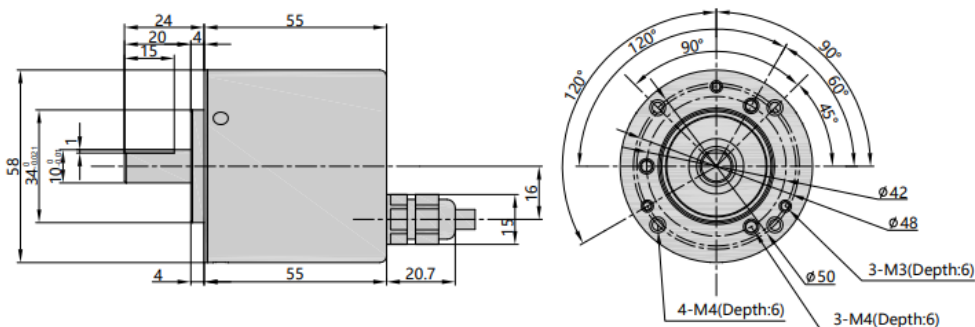

Mechanical specifications

Starting torque (+20°C)	General: ≤0.01N·m
Shaft moment of inertia	Dust and splash proofed: ≤0.04N·m
Allowable shaft load	Radial: 100N
	Axial: 50N
Max. allowable rotation speed	5000rpm
Service life of bearing	1.2×10 ⁹ revolutions (calculated value at the maximum load)
	Material: Oil-proofed PVC (with shielded cable)
Cable	External diameter: Approx.6.0mm
	Length: 2m
	Nominal cross-sectional area: Totem-pole output(5-core): 0.3mm ² Line driver output(8-core twisted pair): 0.2mm ²
Weight (without cable)	General: approx.313g
	Dust and splash proofed: approx.320g

Environmental requirements

Ambient temperature	Operation temperature: -10 ~ +70°C Storage temperature: -25 ~ +85°C
Ambient humidity	35~85%RH (without condensation)
Withstand voltage	AC500V 1minute *Note 1
Insulation resistance	≥50MΩ (Excluding shield between power supply, signal wire and case.)
Vibration resistance	Durable for 1h along 3 axes at 10 to 55Hz with 0.75mm amplitude
Shock resistance	11ms with 490m/s ² applied 3 times 3 axes, total 18 times
Protection construction	General: IP50 dust and splash proofed: IP65

Note1: Shield wire is connected to the encoder body. The enclosure is connected with 0V wire through a 630V 0.01μF capacitance.


Electrical specifications

Power supply	Output type	Totem-pole output		Line driver output	
	Power supply voltage	RZ: 10~30VDC	RZV: 4.75~5.25VDC	RZVH: 4.75~30VDC	
Allowable ripple		≤3%rms			
Current consumption		≤100mA (without load)			
Signal format		Two-phase A and B+Phase Z			
Max. response frequency	100kHz	200kHz			
Electric Max. allowable speed	(Maximum response frequency/Pulse)×60 (The encoder can not respond to revolution faster than the electric maximum allowable speed.)				
Duty ratio	50%±25%				
Phase Shift	25%±12.5%				
Index signal width	100%±50%				
Output	Rise and Fall time	2μs Max. (Cable length: 2m, output current: 20mA (Resistance load))			
	Output type	Totem-pole output	Line driver output (26C31 or equivalent)	Line driver output (IC-HD7 or equivalent)	
	Output voltage	H-level voltage ≥(Power source voltage-4V)	≥2.5V (output current: 20mA (resistance load))		L-level voltage ≤2VDC
	Output current	≤2VDC		≤0.5VDC (output current: 20mA (resistance load))	
		≤30mA			

Cautions for use

- Do not wire the cable in parallel with other power lines and do not share a duct with other cables.
- Use capacitors or surge absorption elements to remove the sparks caused by relays and switches in the control panel as far as possible.
- Be sure to connect all wires properly, as wrong wiring can damage the internal circuitry.
- Erroneous pulses may be caused at the time of power ON and power OFF. After power ON, wait for at least 0.5 sec before use.
- Use a specified coupling for connecting the encoder shaft and the shaft of a machine to be controlled. Do not squeeze the shaft into the coupling.
- The service life of the bearing is largely affected by the amount of load to the shaft. Try to reduce the load as much as possible.
- Do not disassemble the product. Do not expose the product for a long time to water, even if it is a dust-resistant, jet-proof type. Wipe off any water getting onto the product.
- As the rotary encoder is composed of precision parts, its function will be impaired when it is subjected to shocks. Use sufficient care for handling and mounting.

Options

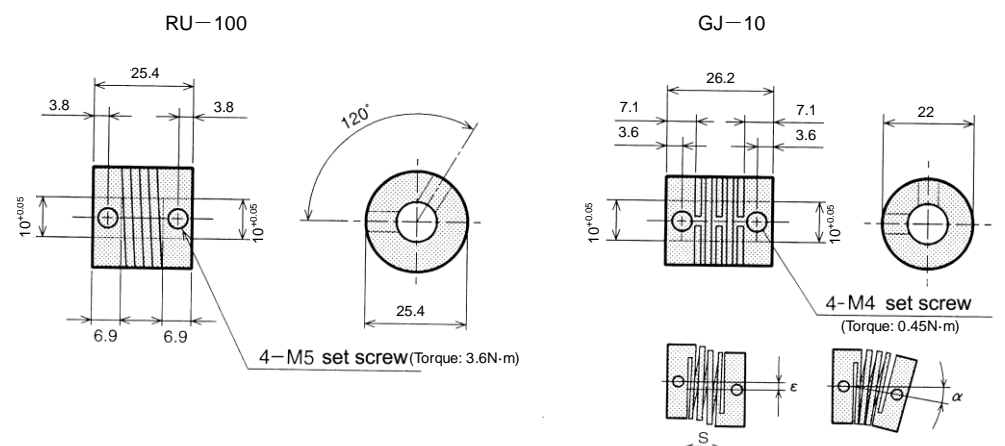

Type No.	Material	α	ε	s
RU-100	Aluminum alloy (7075)	5° MAX	0.25mmMAX	0.25mmMAX
GJ-10	Glass-fiber reinforced polyacetal resin	5° MAX	0.5mmMAX	0.12mmMAX